

SUBLIMATE

L



Special features

- Light grammage
- Fast dry speed
- High transfer yield
- Allow under 200% ink coverage

Typical applications


- Fashion
- Signage
- Home textile

Five-point scale

Ink coverage

Transfer yield

Dry speed

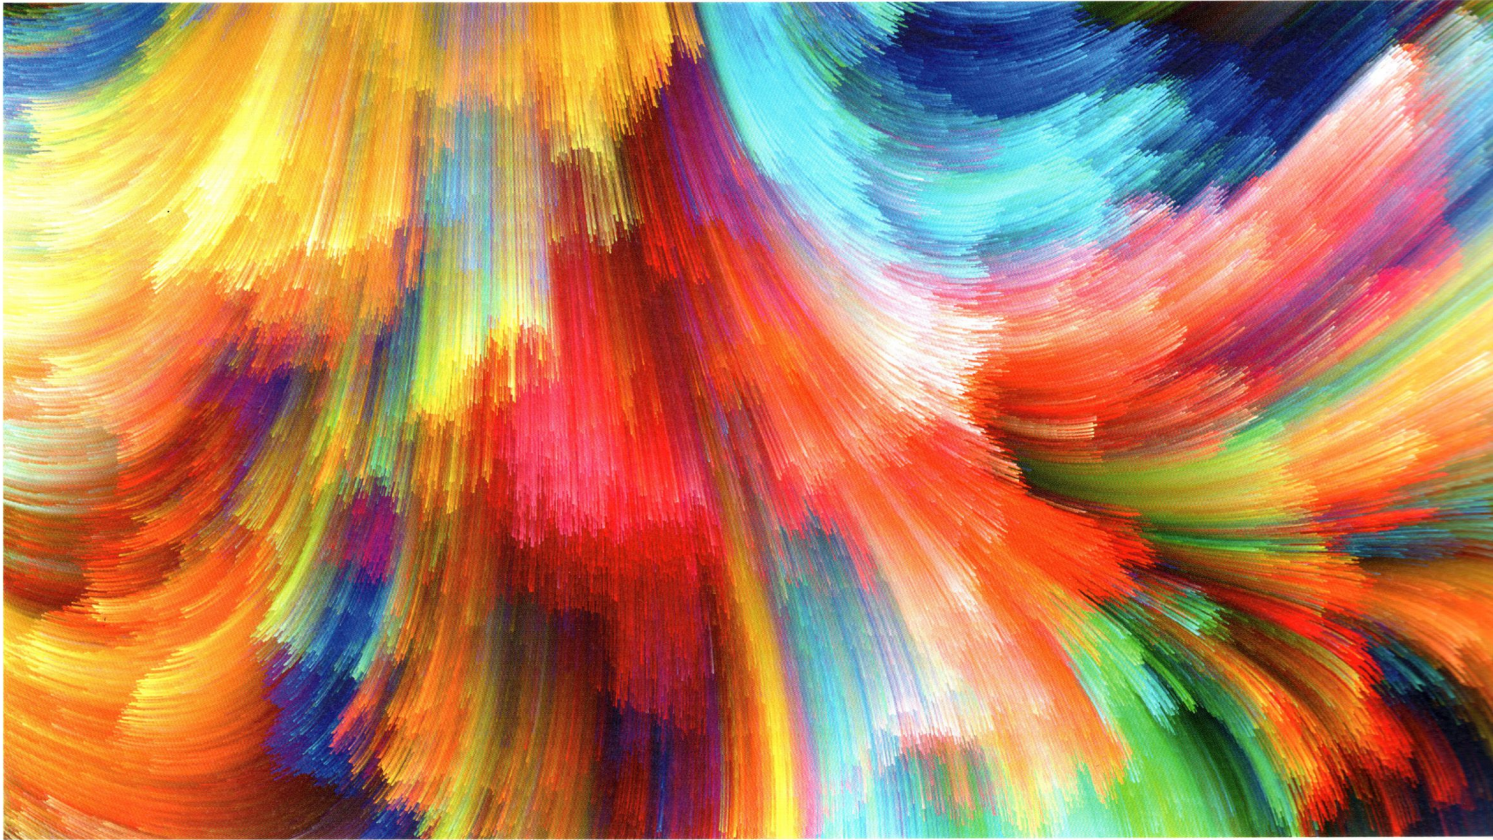

Product range

Physical properties		Unit	58 gsm	73 gsm	Test method
	Basis weight	g/m ²	58 ± 3	73 ± 3	KS M ISO 536
	Thickness	µm	71 ± 4	88 ± 4	KS M ISO 534
	Moisture	%	5.5 ± 1.0	5.7 ± 1.0	TAPPI T 412
	Smoothness	Sec	83 ▲	70 ▲	KS M ISO 5627
	Brightness	%	85 ▲	85 ▲	ASTM E313
	Curl	cm	-10 ± 10	-10 ± 10	"X" Cutting curl
Transfer ratio (textile)	Yellow	O.D	1.40 ▲	1.35 ▲	Temperature: 200 °C Pressure: 20 psi Time: 30 sec
	Magenta		2.10 ▲	2.00 ▲	
	Cyan		2.25 ▲	2.10 ▲	
	Black		2.15 ▲	2.30 ▲	

* All Hansol products are sold with the understanding that each purchaser will independently determine the suitability of any product for the purchaser's intended application