


RECORD

GZH3206SG



- ★ 6 Starfire heads in 3 rows, speed up to **375m²/h!**
- ★ More precise and durable **heavy-duty** body!
- ★ Revolutionary print head with RediJet Tech!
- ★ EnTek Negative Pressure Recirculation System!
- ★ **2X Power** Panasonic servo system!
- ★ **Separate taking up** with standby function!
- ★ Advanced color management software!

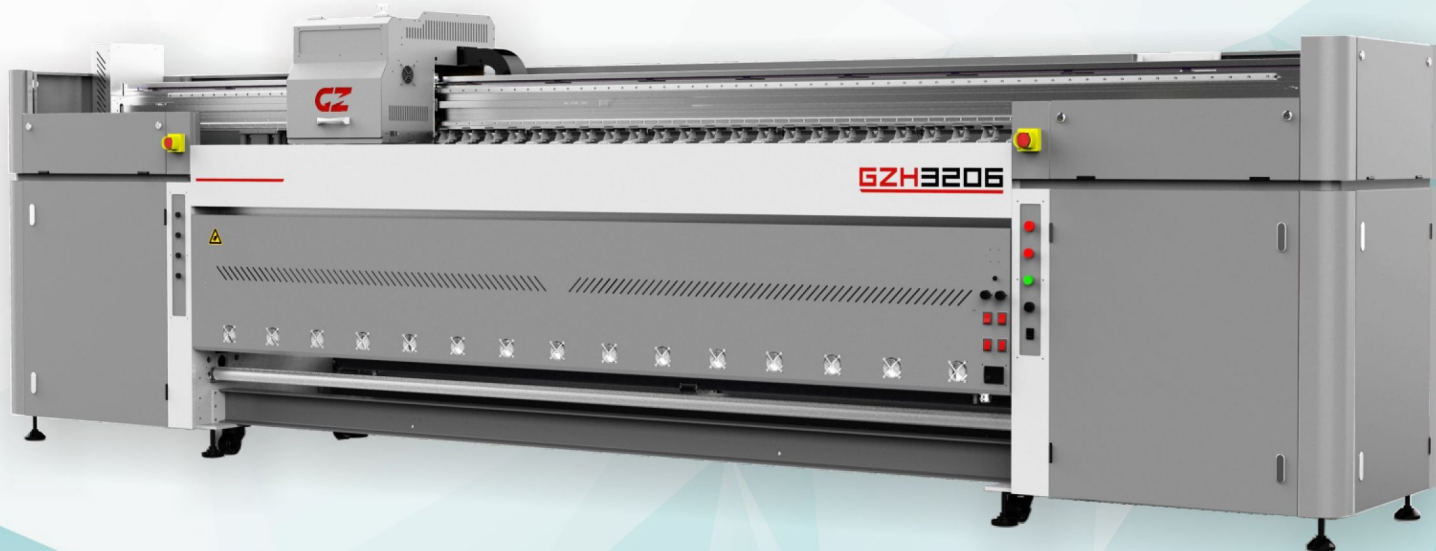

A wide range of applications solution!

With continuous ink recirculation and robust repairable construction, **Dimatix Starfire 1024** print head delivers unparalleled saturation and smooth gradient.

EnTek recirculation solution!

GZ Negative pressure recirculation system with compensation function perfectly plays the advantages of Starfire head, assuring steady ink delivery and minimizing downtime and maintenance.


Four heaters plus smart IR drying system!

Pre, mid, post, extended heaters plus IR drying system treats the media and prints evenly and efficiently during high speed printing. Synchronization IR drying prevents the prints over-burnt and saves energy.




Staggered three rows of heads!

6 Starfire heads staggered in 3 rows for big volume output. CNC aluminum mounting with hard anodizing layer prevents its mechanism from deforming.



Super strong heavy duty body!

Enhanced aluminum beam, beam holders and body frame assure extreme high speed printing & long running life and also prevent deforming during transportation.



Separate taking up system!

Separate media taking up system with IR drier could dry the printing thoroughly during high speed printing. An additional roll saves media switching time to speed up production.

ITEM	SPECIFICATION
Model	GZH3206SG
Print Head	6 Starfire 1024 staggered in 3 rows
Ink	C.M.Y.K solvent/eco-solvent
Ink supply system	EnTek Negative Pressure Recirculation System
Printing width	Max. 3200mm
Media Type	Banner, Frontlit, Backlit, Vinyl, Film.....
Media delivery system	Automatic media feeding and taking up system with pneumatic shaft
Drying system	Pre, mid, post and extended heater + smart IR drying system
Printing Speed	300x400dpi 375m ² /h 300x600dpi 253m ² /h 300x800dpi 191m ² /h 600x400dpi 333m ² /h 600x600dpi 226m ² /h 600x800dpi 170m ² /h
Data Interface	External: USB2.0; Internal: High-speed SCSI
Working Environment	Temp.23°C~29°C, Humidity:50%~80%
Software	Onyx+GZ control console
Power	50Hz/AC,220V±10% 13A(printer)+34A(thermal drying system)+17.5A(separate taking up system)
Installed/ Package Size	LxWxH(mm): 5500x1100x1670/ 5600x1550x1880
G.W./N.W.	1512kgs/ 1262kgs

نشانی: تهران بزرگراه جلال آل احمد، غرب پل آزمایش ساختمان صنعت، پلاک ۲۷۹ طبقه سوم
 تلفن: ۰۲۱-۴۸۳۱۵ همراه: ۰۹۱۲۸۳۳۷۹۲۲ همراه: ۰۹۱۲۱۹۵۲۸۴۶
 نشانی کارخانه: اتوبان قم، حسن آباد، شهرک صنعتی شمس آباد، بلوار نارنجستان، گلبرگ ۹، پلاک ۸